

411-HR (CA)

Brackish Water Desalination FRP Membrane Element Reverse Osmosis

ELEMENT SPECIFICATIONS


Model	Flow		Active Area		Rejection		Part Number
	GPD	(m3/d)	ft2	m2	Average	Minimum	
411-HR (CA)	1,600	6.1	75	7.0	97.5%	96.0%	1117404

Specifications are based on a 2000 mg/L NaCl solution at 420 psig operating pressure (2930kPa), 77deg.F.(25deg.C), 10% recovery, pH 6-7. Individual flux may vary +15%/ -15%. Average salt rejection after a minimum of 24 hours in continuous operation.

OPERATING AND DESIGN PARAMETERS

Membrane: Cellulose Acetate	Optimum rejection pH: 5.0- 6.5
Typical Operating Pressure: 140-400psig (965-2760 kPa)	Operating pH range: 5.0-6.5
Maximum Pressure: 450psig (3143 kPa)	Cleaning pH range: 3.0-8.0
Maximum Pressure Drop: 10 psig (69 kPa) per element 50 psig (345 kPa) per vessel	Maximum Temperature: 86°F (30°C)
Chlorine Tolerance: 1 ppm maximum, continuous 30 ppm for 30 min. during sanitization	Feed NTU: <1
Typical Operating Flux: 10-20 GFD (15-35 L.H-1.M-2)	Feed SDI: <5

ELEMENT DIMENSIONS AND WEIGHT

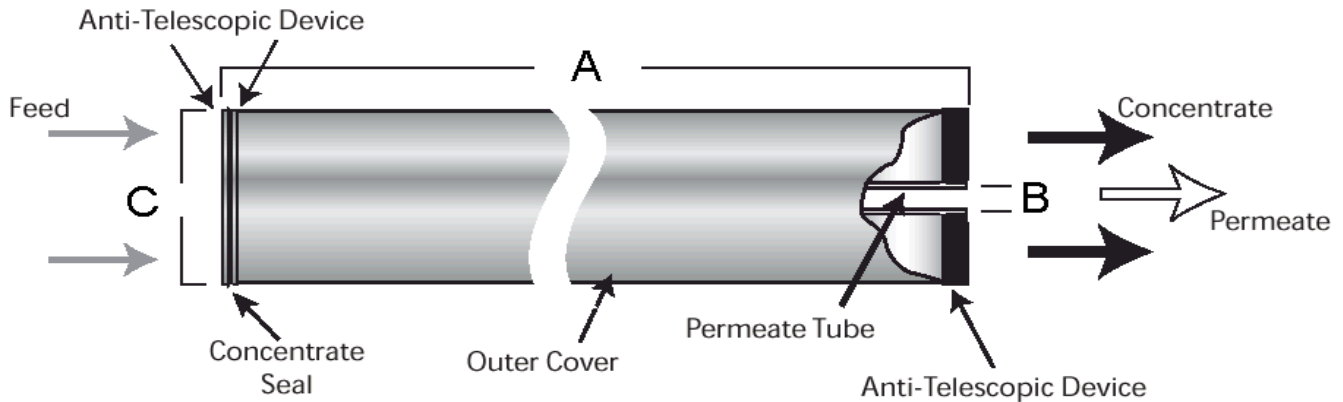

Model	A inches (mm)	B inches (mm)	C* inches (mm)	Weight lbs (kg)
411-HR (CA)	40.125 (1019)	0.775 (20)	3.94 (100)	11 (5)

* The element diameter (dimension C) is designed for optimum performance in Osmonics pressure vessels. Other pressure vessel dimension and tolerance may result in excessive bypass and

Notes:

The Langelier Saturation Index (LSI) of the concentrate must be negative to minimize the possibility of calcium scale formation on the membrane surface.

At start-up the first two hours of permeate should be discarded because of element preservative.

Storage conditions should be less than: <100F, dry, in original carton and not in direct sunlight.



Visit us online at www.gewater.com
©2004, General Electric Company.
All rights reserved.

Global Headquarters
Trevose, PA
+1-215-355-3300

Americas
Minnetonka, MN
+1-952-933-2277

Europe/Middle East/Africa
Heverlee, Belgium
+32-16-40-20-00

Asia/Pacific
Shanghai, China
+86-21-5298-4573

*Trademark of General Electric Company; may be registered in one or more countries.